
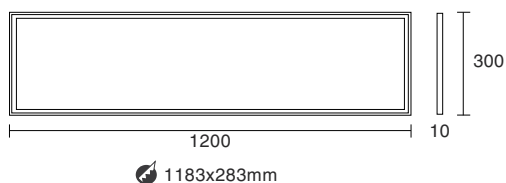


PL-30120DS42/ PL-30120DW42

Panel lights



RoHS

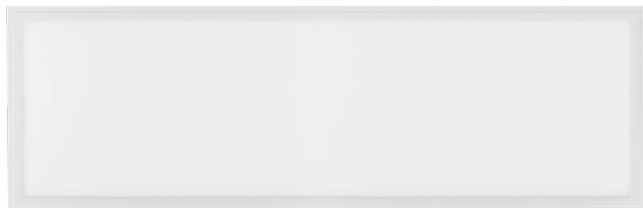

SPECIFICATION


Model Code	PL-30120DS42/ PL-30120DW42
Power	42W
Efficiency	100lm/W (4000K)
Input Voltage	220-240VAC
1-10V Dimmable	Available
Size	1200x300x10mm
Hole size	1183x283mm
Body Color	White/ Silver
LED Source	Bridgelux (USA)
CRI	Ra>80
Beam Angle	120°
CCT	3000K/ 4000K/ 6500K
Lumen	4125lm(W) ,4200lm(N/C)
Life time	Min 30.000h
IP	IP30/ IP65

PHOTOMETRIC CURVES

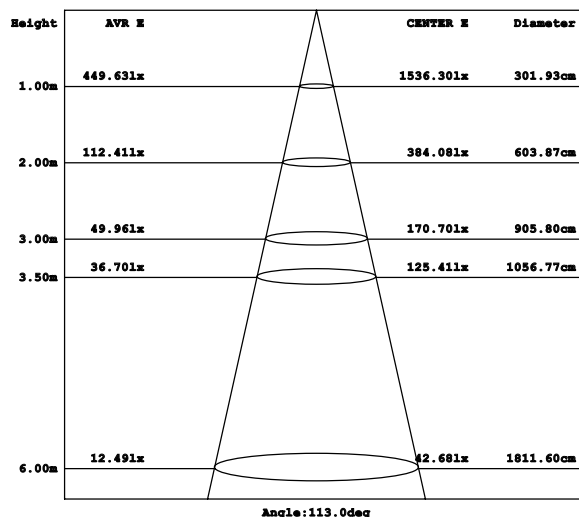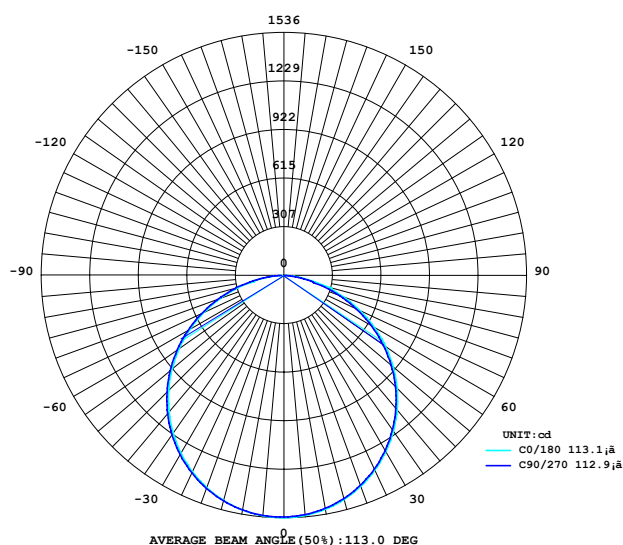


INSTALLATION INSTRUCTIONS


1. Assemble the removable bars into a fixed frame.

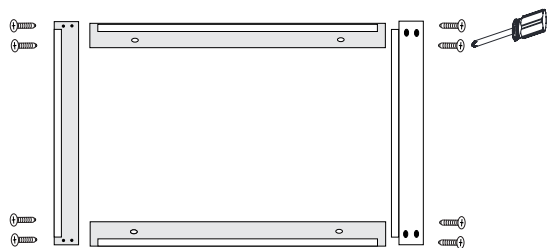


2. Fix the frame to the ceiling

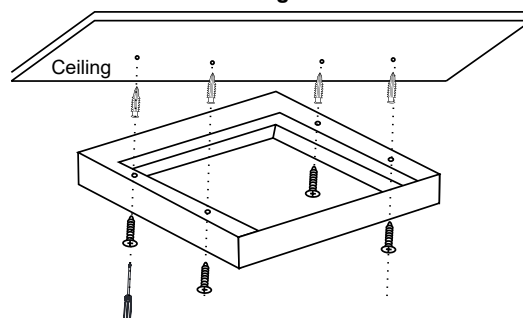


3. Disassemble 1 bar of the case frame to the outside.

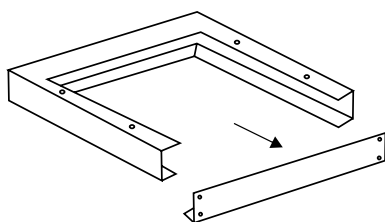


4. Connect LED driver to the power supply, connect LED driver to lamp

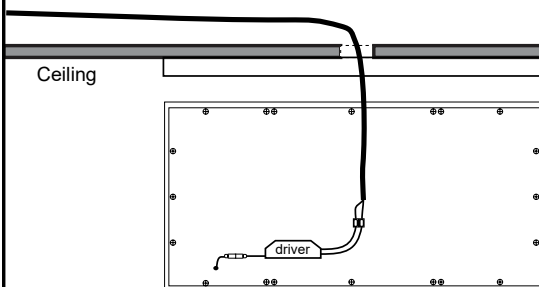

5. Push the lamp into the case frame

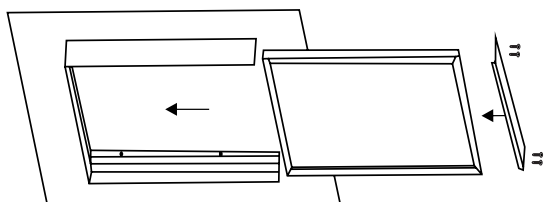

6. Finished installation

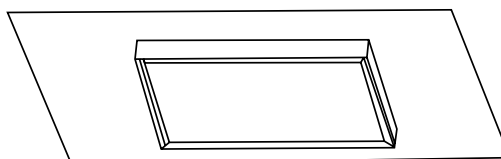

Note: - Disconnect the power supply before connecting the power
 - Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
42W	L1260xW360xH45mm	-	-

